

X2 Truggy Set-up Sheet

Driver: _____

Track: _____ / _____

Air Temp: _____

Track Size	Traction	Surface
☐ open	☐ High	☐ Smooth
☐ Medium	☐ Medium	☐ Medium
☐ Tight	☐ Low	☐ Bumpy

Front Suspension

Shock Spring: _____

Shock Piston: ☐ Standard ☐ Drilled

Shock Oil wt: _____

Shock Length
(Center to Center) _____

Toe-IN: ☐ _____

Toe-Out: ☐ _____




Front Ride Height: _____ mm

Sway Bar: ☐ 2mm ☐ 2.3mm ☐ 2.5mm

Camber: ☐ Neg: _____

☐ Pos: _____


Caster Block: ☐ A/A ☐ B/B

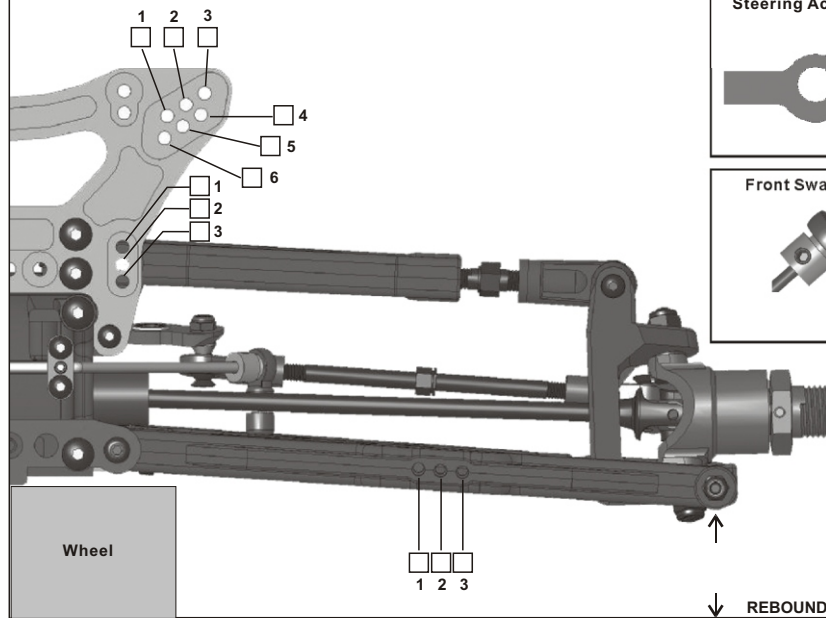

Steering Ackerman Location



Front Sway Bar Preload



Notes: _____

Rear Suspension

Shock Spring: _____

Shock Piston: ☐ Standard ☐ Drilled

Shock Oil wt: _____

Shock Length
(Center to Center) _____




Rear Ride Height: _____ mm

Sway Bar: ☐ 2.3mm ☐ 2.5mm ☐ 2.8mm
☐ _____ ☐ None


Camber: ☐ Neg: _____

☐ Pos: _____


Rear Hub/Wheelbase: ☐ Forward ☐ Middle ☐ Back

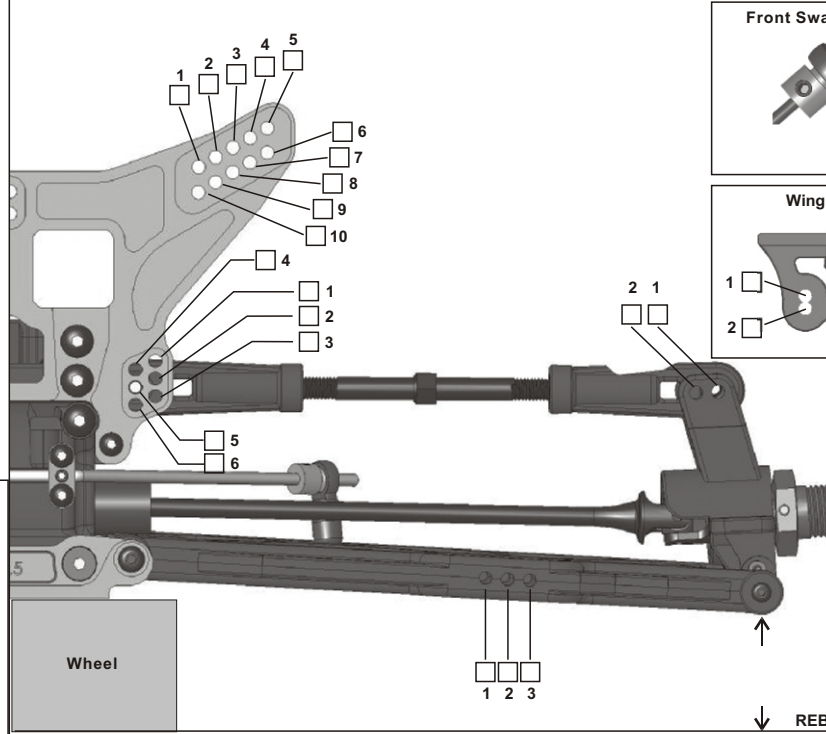

Front Sway Bar Preload



Wing Position



REBOUND STOP

Differential

Front Type: ☐ STD ☐ Torsen Oil _____ K

Center Type: ☐ STD ☐ Torsen Oil _____ K

Rear Type: ☐ STD ☐ Torsen Oil _____ K

Tires

Front Type: _____ Compound _____

Foam: _____

Rear Type: _____ Compound _____

Foam: _____

Note: _____

Engine

Type: _____

Head Clearance _____ Port: _____

Pipe: _____

Fuel: _____ %

Plug _____ ☐ Turbo ☐ Normal

CLUTCH

Shoe Brand: _____ Compound: _____ ☐ ALUM: ☐ Blue ☐ Red

Spring Brand: _____ Tension _____

Gearing: _____ 13T _____ 14T TO _____ 46T _____ 48T

Note: _____

Clutch Shoes:

☐ 2 Shoes

☐ 3 Shoes

☐ 4 Shoes