

Driver: _____

Date: _____ Track: _____ / _____ AirTemp: _____ ☐ F ☐ C

TRACK: SIZE	TRACTION:	SURFACE:
☐ OPEN	☐ HIGH	☐ DUST
☐ MEDIUM	☐ MEDIUM	☐ MEDIUM
☐ TIGHT	☐ LOW	☐ BUMPY

Front Suspension

Shock Spring: _____

Shock Piston: ☐ Standard ☐ Drilled _____

Shock Oil wt: _____

Shock Length
(Center to Center) _____ mm

Toe-IN: ☐ _____

Toe-Out: ☐ _____



Front Ride Height: _____

Sway Bar: ☐ 2mm ☐ 2.3mm ☐ 2.5mm
☐ _____ ☐ None

Camber: ☐ Neg: _____

☐ Pos: _____


Caster Block: ☐ A/A ☐ B/B

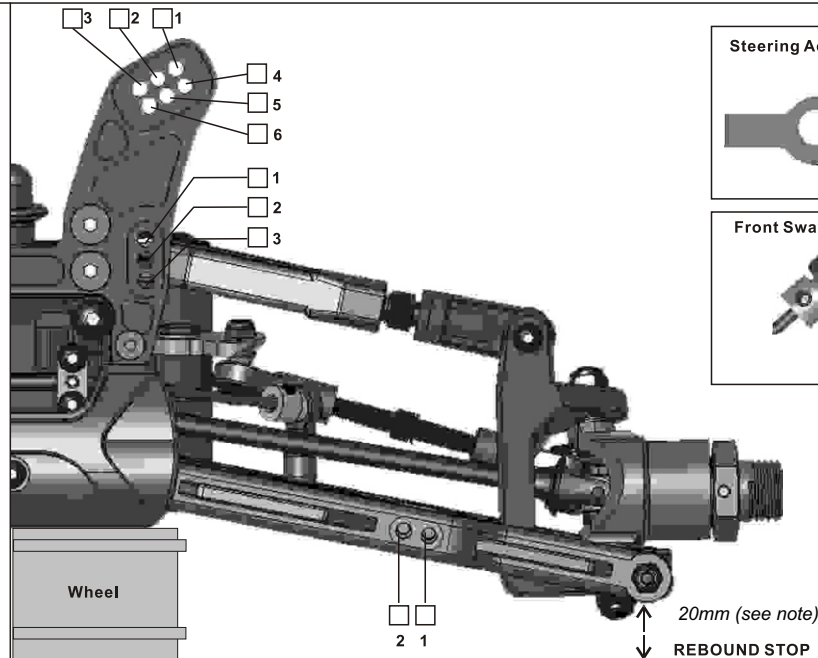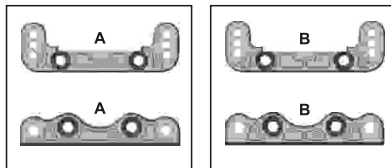

Steering Ackerman Location



Front Sway Bar Preload



Notes: _____

Rear Suspension

Shock Spring: _____

Shock Piston: ☐ Standard ☐ Drilled _____

Shock Oil wt: _____

Shock Length
(Center to Center) _____ mm



Rear Ride Height: _____

Sway Bar: ☐ 2.3mm ☐ 2.5mm ☐ 2.8mm
☐ _____ ☐ None


Camber: ☐ Neg: _____

☐ Pos: _____

Rear Hub/Wheelbase: ☐ Forward ☐ Middle
☐ Back

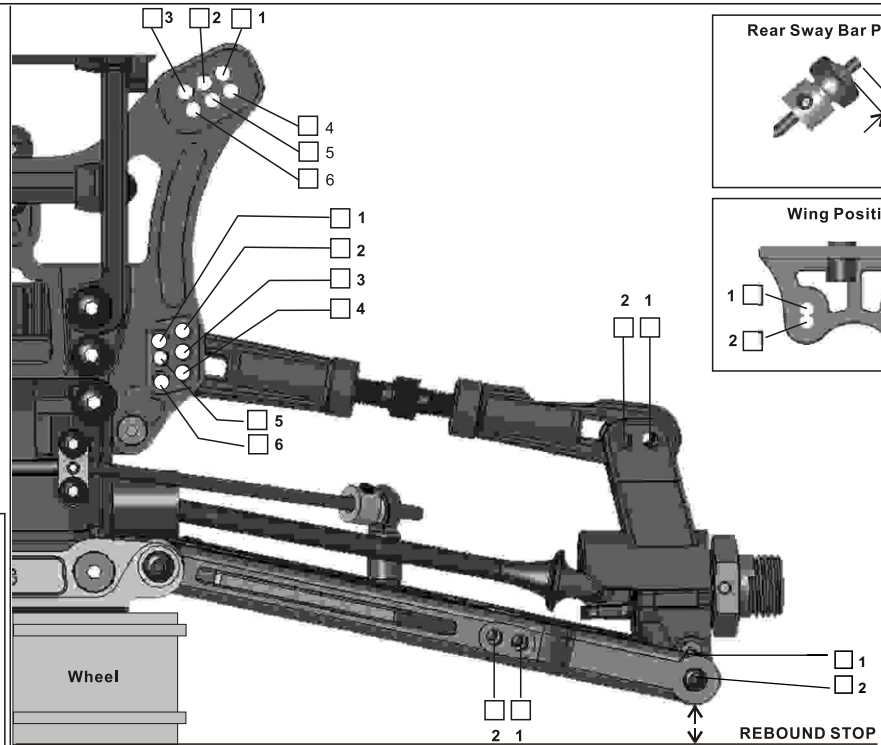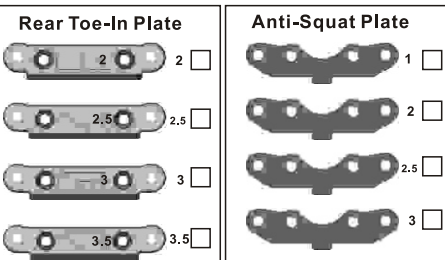

Rear Sway Bar Preload



Wing Position



Differential

Front Type: ☐ STD ☐ Torsen Oil: _____ K

Center Type: ☐ STD ☐ Torsen Oil: _____ K

Rear Type: ☐ STD ☐ Torsen Oil: _____ K

Tires

Front Type: _____ Compound _____ Insert Foam: _____

Rear Type: _____ Compound _____ Insert Foam: _____

Note: _____

Engine

Type: _____ Port: _____

Plug: _____ ☐ Normal ☐ Turbo

Head Clearance: _____

Pipe: _____

Fuel Brand: _____ / _____ %

CLUTCH

Shoe Brand: _____ Compound _____ ALUM: ☐ Blue ☐ Purple

Spring Brand: _____ Tension _____ mm

Gearing: ☐ 13T ☐ 14T To ☐ 46T ☐ 48T

Note: _____

Clutch Shoes:

- ☐ 2 Shoe
☐ 3 Shoe
☐ 4 Shoe
☐ _____